

Experimental investigation on solar air heater with double pass aluminium cans

Umang J Patdiwala, Kaushik J Savaliya, Maulik G Sukhadiya

Abstract— solar air heaters are used for applications at low and moderate temperatures such as; crop drying, timber seasoning, and space heating. This method substantially improves the collector efficiency by increasing the fluid velocity and enhancing the heat-transfer coefficient between the absorber plate and air. These types of collectors had been designed as a proposal to use an absorbing plate made of aluminium cans into the double-pass channel in a flat-plate to build absorber plates of SAHs at a suitable cost. In the first type (Type I), cans had been staggered as in order on absorber plate, while in Type II they were arranged in zigzag. Type III is a flat plate arrange with baffles. For the same flow rate, the efficiency of the double pass is found to be higher than the single pass. An efficiency test was used to find the best fin arrangement of the receiver. Air enters the upper channel and lower channel of the air heater flows to outside in the parallel direction. If 2-10 m/s speed limit of air in piping system is assumed, proposed some arrangement fin technology enables an efficiency improvement in relation to the smooth pipe arrangement of the solar collector with black paint.

Index Terms:-Introduction, Experimental Setup, Thermal performance, Result and Discuss.

I. INTRODUCTION

The main applications for SAHs are space heating, drying and paint spraying operations. Numerous SAH devices have been developed and used experimentally [1]. A glass or transparent cover is fixed above the absorber plate and the system is insulated thermally from the back and from the sides. SAHs are simple in design and maintenance. Corrosion and leakage problems are less severe compared with liquid heater solar systems. The main drawback of an SAH is that the heat-transfer coefficient between the absorber plate and the air stream is low, which results in a lower thermal efficiency of the heater. However, different modifications are suggested and applied to improve the heat-transfer coefficient between the absorber plate and air [2]. There are different factors affecting the SAH efficiency, e.g. collector length, collector depth, type of absorber plate, glass cover, wind speed, etc. Increasing the absorber plate shape area will increase the heat transfer to the flowing air, but on the other hand, will increase the pressure drop in the

collector; this increases the required power consumption to pump the air flow crossing the collector [3]. Several configurations of SAHs have been developed in literature. Various designs, with different shapes and dimensions of the air flow passage in plate type solar air collectors were tested. The double-flow type SAHs have been introduced for increasing the heat-transfer area, leading to improved thermal performance. The increases of thermal energy between the absorber plate and the air, which clearly improves the thermal performances of the solar collectors with obstacles arranged into the air channel duct. Sahu and Bhagoria [4] planned to investigate the effect for different pitch of 90 degree broken wire rib roughness on the enhancement of thermal performance of SAH. Ghoneim [5] investigated the effects of gap thickness on the performance of compound honeycomb using the solar collector. Sadasuke are made on the performance of a collector with a flow in the upper channel on the absorber plate as well as in the lower channel. Njomo [6] examined the unsteady state heat exchanges governing the functioning of an unglazed one-pass SAH utilizing a non-porous selective absorber. The mathematical model developed is then used to predict the thermal performances of such a collector.

A. Solar Collectors

A solar thermal collector is a solar collector specifically intended to collect heat, that is, to absorb sunlight to provide heat. There are various types of thermal collectors, such as solar parabolic, solar trough and solar towers. These types of collectors are generally used in solar power plants where solar heat is used to generate electricity by heating water to produce steam and driving a turbine connected to the electrical generator [7]. Fig. 1 shows the classification of solar collectors.

B. Solar Air Heater

A solar air heater is a simple device to heat air by utilizing solar energy, which has many applications in drying agricultural products, such as seeds, fruits and vegetables, and as a low-temperature energy source. Also, solar air heaters are utilized for heating buildings with auxiliary heaters to save energy in winter-time [8]. Solar air heaters can also be used for industrial purposes. Radiation energy of sun is absorbed by an absorber plate and then transferred to air as shown in Fig. 2. This heated air can be used further according to our requirement. Different configurations are possible for air flow in the passage [9]. Solar air heaters are simple in design and maintenance.

Manuscript received June 12, 2014.

Umang Patdiwala, Asst. Prof., Mechanical Engineering, Gujarat Technology University/Gandhinagar Institute of Technology, Ahmedabad, India, 9904405926.

Kaushik Savaliya, Asst. Prof., Mechanical Engineering, Gujarat Technology University/Gandhinagar Institute of Technology, Ahmedabad, India, 9909431271.

Maulik Sukhadiya, M.E. Research Scholar, Mechanical Engineering, Gujarat Technology University/Gandhinagar Institute of Technology, Ahmedabad, India, 9428411317.

Experimental investigation on solar air heater with double pass aluminium cans

Depending upon the air passage in the solar air heater the air heaters can be classified in the following ways:

- Single glass cover air heater
- Double glass cover air heater
- Counter air heater without porous media
- Counter air heater with porous media

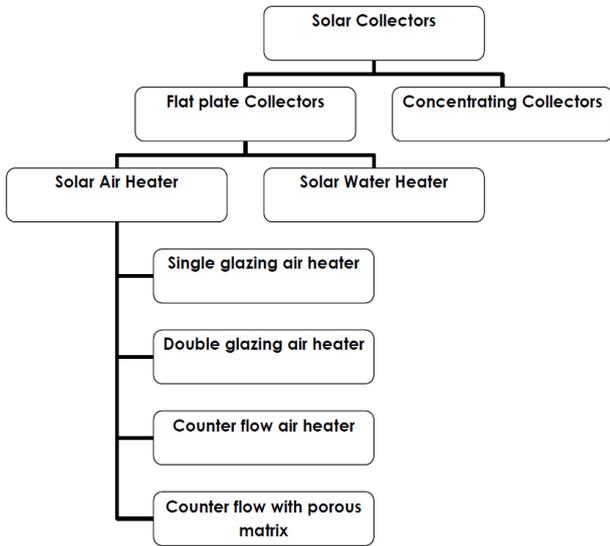


Fig. 1 Classification of solar collectors

II. EXPERIMENTAL SETUP AND MEASUREMENT

A model of the constructed double-flow SAH system of collector is shown in Fig. 2, and photographs of the three different absorber plates of the SAH collector and the view of the absorber plate in the collector box are shown in Fig.3, Fig.4, and Fig.5 respectively. In this study, three types of absorber plates were used. The absorbers were made of aluminium sheet with black selective coating. Dimension and plate thickness for all three collectors were 1 m, 1 m and 2 mm, respectively. Normal window glass of 4 mm thickness was used as glazing. Single cover glass was used in all three collectors. Thermal losses through the collector backs are mainly due to the conduction across the insulation (thickness 3 cm) and those caused by the wind and the thermal radiation of the insulation are assumed negligible.

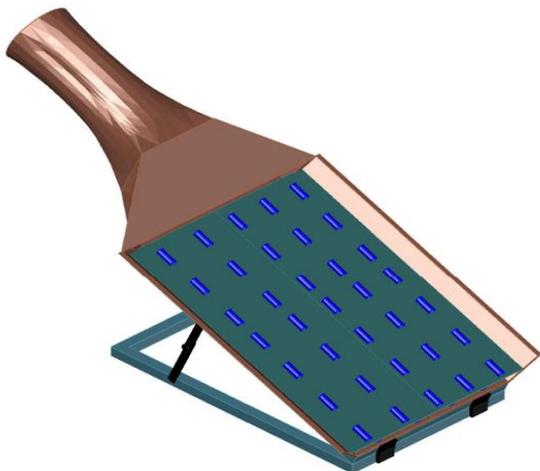


Fig. 2: Solar air heater

The absorber surface which is the most important part of the SAH consisted of 3 circular cross section air flow channels made of 32(16_2, upper and bottom surfaces) aluminium cans painted in black in type I and the SAH consisted of five circular cross-section air flow channels made of 50(25_2, upper and bottom surfaces) aluminium cans painted in black in type II. Each aluminium can was opened on the top and bottom, their surface was cleaned using water. Thermocouples were positioned evenly, on the top surface of the absorber plates, at identical positions along the direction of flow, inlet and outlet air temperatures were measured by two well insulate thermocouples [10]. The output from the thermocouples was measured in degrees Celsius by temperature indicator. The total solar radiation incident on the surface of the collector was measured with a solar power meter. This meter was placed adjacent to the glazing cover, at the same plane, facing due south. The experimental setup was situated at Latitude 23° 09' 52''N and Longitude 72° 26' 27''E. The measured variables were recorded at time intervals of 30 min and include isolation, inlet and outlet temperatures of the working fluid circulating through the collectors, ambient temperature, absorber plate temperatures at several selected locations and air flow rates (HTCAVM-07 digital anemometer). The air was provided by a blower with a maximum capacity of rpm 16,000 and that can regulate by AC variacmeter. The blower placed at the outlet of the collectors sucked in the air. All tests began at 10:00 AM and ended at 4:00 PM.

A. TYPE – I

In this case the solar air heater conventionally manufactures. The temperature at the inlet and outlet are measure also the intermediate air temperature measure by the thermocouple. The mean plate temperature calculates. The air is first pass in series type from the inlet of the air heater as shown in Fig. 3. Also the wind velocity is changing from 2 to 10m/s.



Figure 3: Photograph of Type I arrangement in double solar air heater with aluminium cans

B. TYPE – II

In this case the solar air heater conventionally manufactures. The temperature at the inlet and outlet are measure also the intermediate air temperature measure by the

thermocouple. The mean plate temperature calculates. The air is first pass in series type from the inlet of the air heater as shown in Fig. 4. Also the wind velocity is changing from 2 to 10m/s.

C. TYPE – III

In this case the solar air heater conventionally manufactures. The temperature at the inlet and outlet are



Figure 4: Photograph of Type II arrangement in double solar air heater with aluminium cans

also the intermediate air temperature measure by the thermocouple. The mean plate temperature calculates. The air is first pass in series type from the inlet of the air heater as shown in Fig. 5. Also the wind velocity is changing from 2 to 10m/s.



Figure 5: Photograph of Type III arrangement in double solar air heater with aluminium cans

III. PROCEDURE FOR EXPERIMENTAL SETUP:

Here in this experiment I will work with the following different conditions:

Double pass solar air heater with the aluminium can place in series form.[Type-I] Double pass solar air heater with the

aluminium can place in zigzag form.[Type-II] Double pass solar air heater with the aluminium baffles place in offset as zigzag form.[Type-III] Taking the readings for air suction from the outlet of this arrangement by thermocouple.

Here all the conditions are further work with the varying the wind velocity of the air flowing through the air heater. In case of all above four conditions the wind velocity is changed with the values 2, 4, 6, 8 and 10 meters/seconds [11].

Table 4.1: Experiments Specification

Double pass solar air heater with aluminium cans			
Arrangement	TYPE - I	TYPE – II	TYPE – III
Velocity	V=2m/s	V=2m/s	V=2m/s
	V=4m/s	V=4m/s	V=4m/s
	V=6m/s	V=6m/s	V=6m/s
	V=8m/s	V=8m/s	V=8m/s
	V=10m/s	V=10m/s	V=10m/s

IV. CALCULATE THERMAL EFFICIENCY

The thermal efficiency of the solar collectors (η) is defined as the ratio between the energy gain and the solar radiation incident on the collector plane,

$$\eta = \dot{m}C_p(T_{a,out} - T_{a,in}) / (IA_c) \tag{1}$$

Where,

m is the mass of air [kg/s],

C_p is specific heat of air [kJ/kg k],

$T_{a, out}$ is temperature at outlet of air [° C],

$T_{a, in}$ is temperature at inlet of air [° C],

I is solar isolation intensity [w/m²],

A_c is collector area [m²],

V. RESULTS

A. Tables and Graphs

An experimental investigate on DPSAH (double pass solar air heater) with alluminium cans the results as discuss below with graph of efficiency with respect to time.

For each operating condition there are five comparative readings were taken for changing the velocity of the air flowing from the air heater. The change in the wind velocity changes the mass flow rate of the air heated by the air heater. The wind velocity is changed in order of 2, 4, 6, 8, 10 m/s for each operate conditions. From the equation 3.4.1 we can get the value of the air heater efficiency.

Experimental investigation on solar air heater with double pass aluminium cans

Table 1 as below which shows the efficiency versus time of DPSAH of TYPE 1 as respectively different velocity to 2, 4, 6, 8, and 10 m/s.

Table: 1 Efficiency of DPSAH Type -1 arrangement

TYPE 1					
DATE	12/5/2014 to 16/5/2014		VELOCITY:- 2 /4/6/8/10 m/s		
TIME	2 m/s	4 m/s	6 m/s	8 m/s	10 m/s
Min	H	η	η	η	η
10:00	6.24	12.4	18.55	16.19	16.24
10:30	6.7	13.48	19.09	16.92	16.51
11:00	6.76	13.73	20.28	18.41	16.86
11:30	6.86	14.29	21.41	19.21	18.54
12:00	6.91	14.83	21.57	20.01	18.51
12:30	7.18	14.93	22.37	20.71	19.78
13:00	7.45	15.05	22.95	21.24	19.45
13:30	7.63	16.49	24.61	22.35	20.23
14:00	7.36	15.51	23.94	21.31	19.03
14:30	6.96	15.01	23.19	20.01	18.75
15:00	6.81	14.74	22.88	19.28	18.43
15:30	6.6	14.41	22.28	18.01	16.51
16:00	6.46	14.08	21.42	17.11	16.14

10:00	6.59	13.81	18.67	17.35	17.99
10:30	6.72	14.16	20.97	18.75	18.13
11:00	7.39	14.42	21.23	19.21	18.24
11:30	7.16	14.82	21.35	19.07	18.36
12:00	7.42	15.41	21.69	20.01	18.55
12:30	7.43	15.44	22.42	20.71	19.84
13:00	7.48	15.58	23.84	21.78	20.82
13:30	8.09	16.51	26.45	22.46	21.49
14:00	7.64	16.62	25.36	21.22	20.36
14:30	7.52	16.51	24.76	20.01	18.77
15:00	7.13	16.49	24.55	19.21	18.45
15:30	6.92	16.27	24.31	19.01	17.94
16:00	6.87	15.45	23.79	18.51	16.27

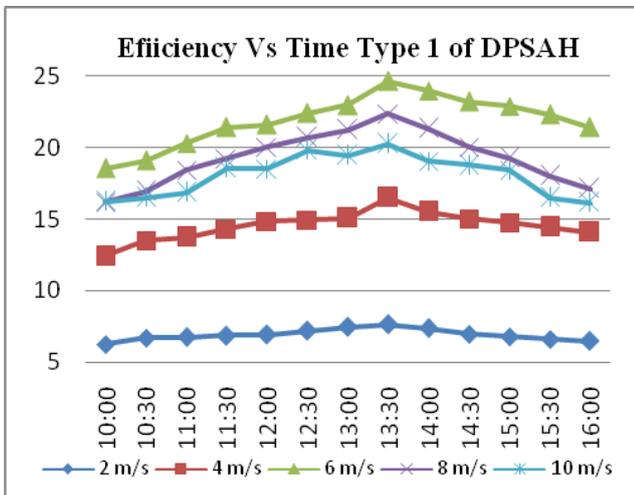


Table2 as below which shows the efficiency versus time of DPSAH of TYPE 2 as respectively different velocity to 2, 4, 6, 8, and 10 m/s.

Table: 2 Efficiency of DPSAH Type 2 arrangements

TYPE 2					
DATE	19/5/2014 To 23/5/2014		VELOCITY:- 2 /4/6/8/10 m/s		
TIME	2 m/s	4 m/s	6 m/s	8 m/s	10 m/s
min	η	η	η	η	η
10:00	5.12	10.28	14.26	13.26	12.56
10:30	5.63	10.84	14.85	14.24	13.04
11:00	5.83	11.29	15.49	14.69	13.88
11:30	5.94	11.56	16.06	15.78	14.21
12:00	6.08	11.71	16.72	15.76	14.48
12:30	6.23	12.01	17.21	15.75	14.88
13:00	6.38	12.27	17.25	16.33	15.16
13:30	6.51	12.74	18.8	16.88	15.43
14:00	6.36	12.49	18.11	16.17	15.44
14:30	6.16	12.25	17.71	15.74	14.78


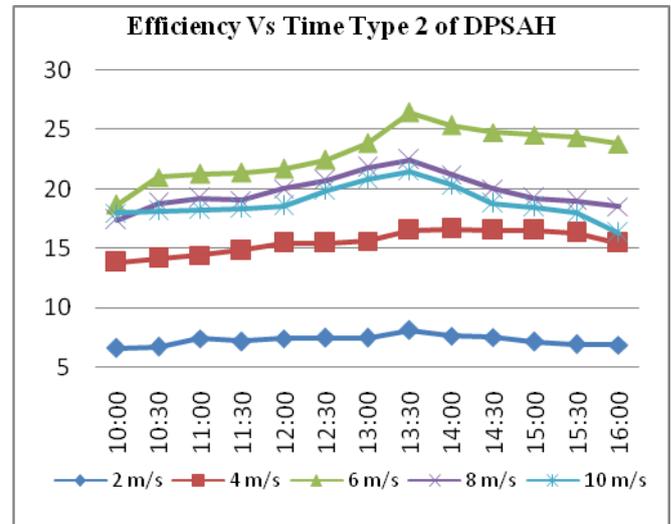


Table3 as below which shows the efficiency versus time of DPSAH of TYPE 3 as respectively different velocity to 2, 4, 6, 8, and 10 m/s.

Table: 3 Efficiency of DPSAH Type 3 arrangements

TYPE 3					
DATE	26/5/2014 To 30/5/2014		VELOCITY:- 2 /4/6/8/10 m/s		
TIME	2 m/s	4 m/s	6 m/s	8 m/s	10 m/s
min	η	η	η	η	η
10:00	5.12	10.28	14.26	13.26	12.56
10:30	5.63	10.84	14.85	14.24	13.04
11:00	5.83	11.29	15.49	14.69	13.88
11:30	5.94	11.56	16.06	15.78	14.21
12:00	6.08	11.71	16.72	15.76	14.48
12:30	6.23	12.01	17.21	15.75	14.88
13:00	6.38	12.27	17.25	16.33	15.16
13:30	6.51	12.74	18.8	16.88	15.43
14:00	6.36	12.49	18.11	16.17	15.44
14:30	6.16	12.25	17.71	15.74	14.78

15:00	5.94	11.85	17.89	14.85	14.51
15:30	5.72	11.29	17.82	14.28	13.88
16:00	5.68	11.24	17.14	14.13	13.81

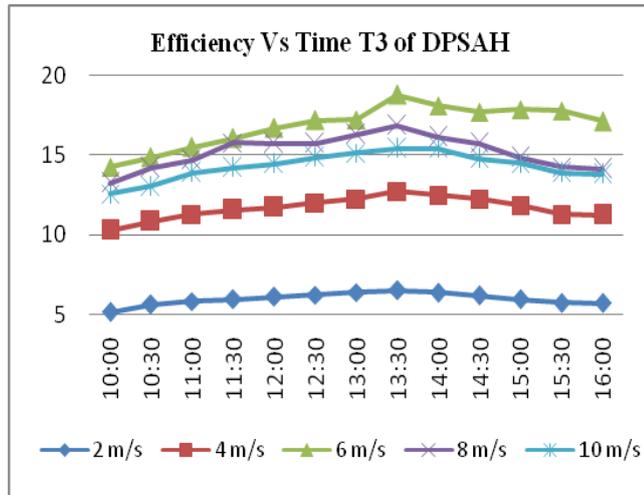

VI. CONCLUSION

In the present work the conventional solar heater is modified by using double pass with aluminium cans to increase heat transfer rate.

The performance of double pass air heater is investigated. The heat loss from the top cover is reduced in case of double pass solar air heater for the entire different range of mass flow rate. The efficiency of double pass solar air heater is further increase by adding aluminum can son both the channels. The path of the air travel is increased in case of double flow solar air heater resulting higher outlet temperature of the same mass flow rate. This collector minimizes the heat losses to the ambient and maximizes the heat transfer to the air stream. In these arrangements Type 2 is higher efficient with compare to other Type 1 and Type 3 arrangements. Increasing wind velocity increases the mass flow rate. As we increase the mass flow rate it the outlet temperature decreases due to decreasing the time for heat transfer process from absorber to air.

REFERENCES

- [1.] Ho CD, Yeh HM, Wang RC. Heat-transfer enhancement in double-pass flatplate solar air heaters with recycles. *Energy* 2005; 30(15):2796–817.
- [2.] Mohamad AA. High efficiency solar air heater. *Solar Energy* 1997; 60(2):71–6.
- [3.] Esen H. Experimental energy and energy analysis of a double-flow solar air heater having different obstacles on absorber plates. *Build Environ* 2008; 43(6):1046–54.
- [4.] Sahu MM, Bhagoria JL. Augmentation of heat transfer coefficient by using 90° broken transverse ribs on absorber plate of solar air heater. *Renew Energy* 2005; 30(13):2057–73.
- [5.] Ghoneim AA. Performance optimization of solar collector equipped with different arrangement of square-celled honeycomb. *Int J Ther Sci* 2005; 44(1):95–105.
- [6.] Njomo D. Unglazed selective absorber solar air collector: heat exchange analysis. *Heat Mass Transf* 2000; 36(4):313–7.
- [7.] A.P. Omojaro, L.B.Y. Aldabbagh et al. “Experimental performance of single and double pass solar air heater with fins and steel wire mesh as absorber”, 2010.
- [8.] Ebru Kavak Akpınar, Fatih Kocyyigit, Energy and exergy analysis of a new flat-plate solar air heater having different obstacles on absorber plates
- [9.] K. Sopian, M.A. Alghoul, Ebrahim, M. Alfegi, M.Y. Sulaiman et al. “Evaluation of thermal efficiency of double-pass solar collector with porous–nonporous media”, 2009.

- [10.] Filiz Ozgen, Mehmet Esen, Hikmet Esen. “Experimental investigation of thermal performance of a double-flow solar air heater having aluminium cans”, 2009.
- [11.] Y. Tian, C.Y. Zhao et al. “A review of solar collectors and thermal energy storage in solar thermal Applications”, 2013.
- [12.] M.K. Gupta and S.C. Kaushik., “Performance evaluations of solar air heater having expanded metal mesh as artificial roughness on absorber plate” *International Journal of Thermal Sciences* 48 (2009) 1007–1016
- [13.] Hikmet Esen, “Experimental energy and exergy analysis of a double-flow solar air heater having different obstacles on absorber plates” *Building and Environment* 43 (2008) 1046–1054
- [14.] Santosh B. Bopche, Madhukar S. Tandale, ‘Experimental investigations on heat transfer and frictional characteristics of a turbulator roughened solar air heater duct’
- [15.] Fatih Bayraka, Hakan F. Oztob, Arif Hepbasli, Energy and exergy analyses of porous baffles inserted solar air heaters for building applications
- [16.] Prashant Dhiman, N.S. Thakur, Anoop Kumar, Satyender Singh et al. “An analytical model to predict the thermal performance of a novel parallel flow packed bed solar air heater”, 2011.
- [17.] H.M. Yeh, T.T. Lin, “The effect of collector aspect ratio on the collector efficiency of flat-plate solar air heaters”, *Energy* 20 (10) (1995) 1041–1047.
- [18.] Ratna Verma, Ram Chandra and H. P. GARG., “Optimization of solar air heaters of different designs” *Renewable Energy* Vol. 2. No. 4~5, pp. 521 531, 1992
- [19.] Abhishek Saxena Nitin Agarwal Ghanshyam Srivastava” Design and performance of a solar air heater with long term heat storage”, 2013.
- [20.] Foued Chabane, Nouredine Moumni Said Benramache et al. “Experimental study of heat transfer and thermal performance with longitudinal fins of solar air heater”, 2013.
- [21.] Prashant Dhiman, N.S. Thakur, S.R. Chauhan et al.” Thermal and thermo hydraulic performance of counter and parallel flow packed bed solar air heaters”, 2012.
- [22.] Jacek Kasperski, Magdalena Nem et al. “Investigation of thermo-hydraulic performance of concentrated solar air heater with internal multiple-fin array”, 2013.
- [23.] RATNA VERMA, RAM CHANDRA and H. P. GARG., “Optimization of solar air heaters of different designs” *Renewable Energy* Vol. 2. No. 4~5, pp. 521 531, 1992
- [24.] Paisarn Naphon, “On the performance and entropy generation of the double-pass solar air heater with longitudinal fins” *Renewable Energy* 30 (2005) 1345–1357
- [25.] A.A. El-Sebaei, S. Aboul-Enein, M.R.I. Ramadan, S.M. Shalaby, B.M. Moharram, “Thermal performance investigation of double pass-finned plate solar air heater.”, *Applied Energy* 88 (2011) 1727–1739.

Umang Patdiwala, Asst. Prof. in Mechanical engineering Department, M.E. Thermal Engg., Research on Wind Mill.

Kaushik Savaliya, Asst. Prof. in Mechanical engineering Department, M.E. Thermal Engg., Research on Wind Mill and Solar Energy.

Maulik Sukhadiya Student of Master degree in Thermal Engineering (Mechanical Department), Research on solar air heater with experimental setup.